


vanne papillon butterfly valve

PL 1050

01 / 00

TYPE F210 STANDARD

ENCOMBREMENT : ACTIONNEUR PNEUMATIQUE DOUBLE EFFET / GENERAL DIMENSIONS : PNEUMATIC ACTUATOR DOUBLE ACTING

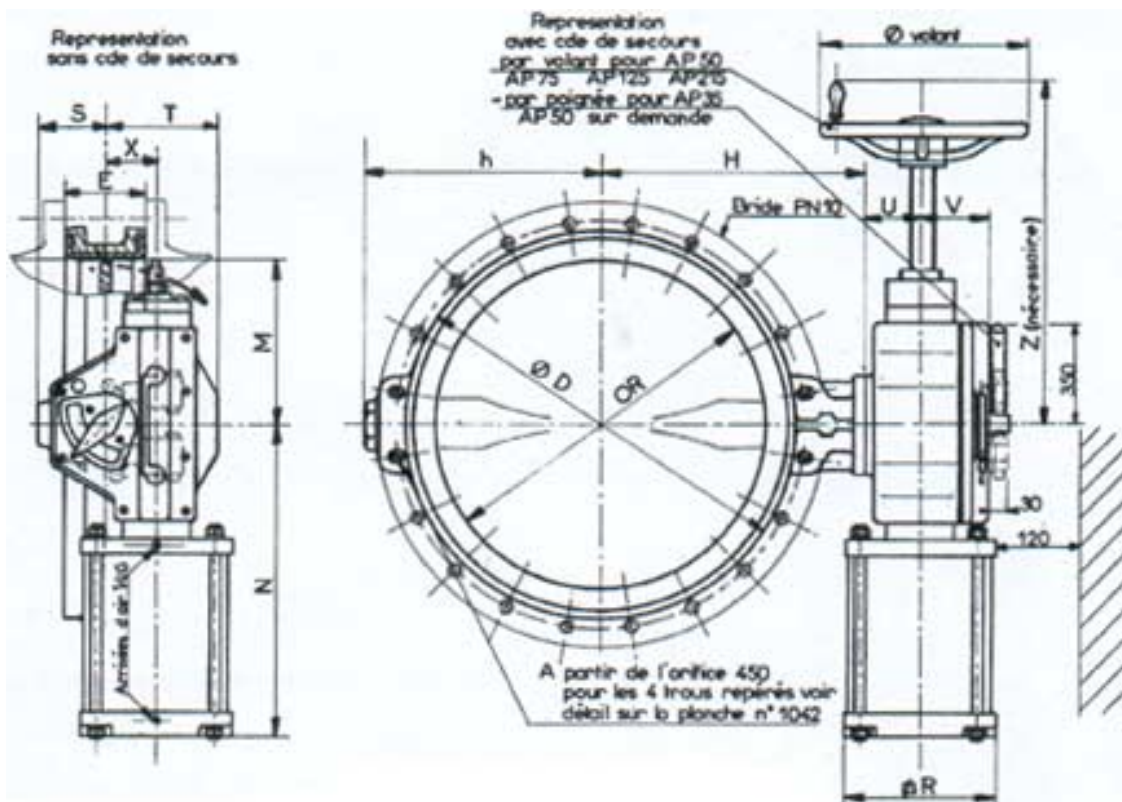

ECARTEMENT ISO série 20

DN	300	350	400	450	500
Pouce / Inch	12 "	14 "	16 "	18 "	20 "
E	78	78	102	114	127
D	375	435	488	535	590
H	281	310	331	370	400
h	240	267	288	327	357
Actionneur/Actuator	AM50	AM50	AM50	AM75	AM75
M	210	210	210	270	270
N	350	350	350	520	520
S	75	75	75	104	104
T	132	132	132	177	177
U	66	66	66	85	85
V	79	79	79	100	100
X	50	50	50	75	75
Poids / Weight (Kg) (sans vérin / Without Actuator)	48	45	65	100	116
Option : Commande manuelle de secours / Safety Device					
Actionneur/Actuator	AM50	AM50	AM50	AM75	AM75
Volant / Wheel	250	250	250	315	315
Z	620	620	620	780	780
Nb tours / Nbr of Turns De volant / Of wheel	28	28	28	42	42
Poids / Weight (Kg) (Cde manuelle / Manual Override)	11	11	11	12	12
Dimensions Vérin AM50 et AM75 / Actuator Dimensions AM50 and AM75					
Diamètre / Diameter	125	200	250	300	350
R	150	230	325	380	435
Poids / Weight (Kg) (vérin / Actuator)	15	33	59	96	132

Vannes Lefebvre – Miroux - B.P. 45 - av. De Lassus – 59481 HAUBOURDIN CEDEX FRANCE
Tel (33) 03 20 17 51 00 – Fax (33) 03 20 17 51 01 - www.lefebvre.fr - contact@lefebvre.fr

PI : 1050 ed : 00